


/ MACHINE STRUCTURE



1. Machine Body
2. Hydraulic Oil Pipe
3. Movable Console
4. Hydraulic Valve
5. Main Motor
6. Hydraulic Station
7. Electric Cabinet

/ STANDARD EQUIPMENT

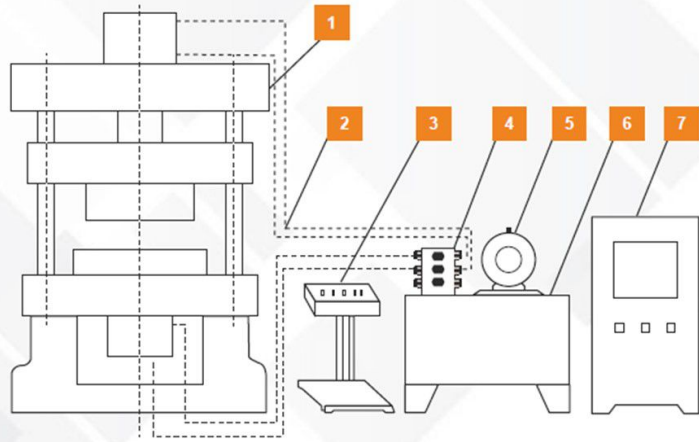

SPECIFICATION

• Y32 FOUR-COLUMN HYDRAULIC PRESS

Model		Y32-63T	Y32-100T	Y32-160T	Y32-200T	Y32-250T	Y32-315T	Y32-400T	Y32-500T	Y32-630T	Y32-800T	Y32-1000T	Y32-1250T	Y32-1600T	Y32-2000T	Y32-2500T	Y32-3000T	
Nominal Force	KN	630	1000	1600	2000	2500	3150	4000	5000	6300	8000	10000	12500	16000	20000	25000	30000	
Return Force	KN	160	250	250	400	630	630	630	1000	1600	2000	2000	2000	2500	3150	4000	5000	
Daylight	mm	800	800	1000	1120	1120	1250	1250	1500	1500	1500	1600	1500	1600	1800	2000	2000	
Slide Stroke	mm	500	500	650	710	710	800	800	900	900	900	1000	1000	1000	1200	1200	1200	
Rejection Stroke	mm	200	200	200	250	250	300	360	360	360	360	450	400	450	450	500	500	
Speed Of Slide	Descent	mm/s	40	70	40	80	>150	120	100	>100	>100	>100	>150	>150	>150	>150	>150	
	Pressing	mm/s	7	15	8	5-12	6-15	5-12	4-10	4-10	5-12	5-12	4-10	4-10	4-10	4-10	5-12	
	Return	mm/s	580	100	65	70	>150	65	70	50	100	90	100	85	>100	160/60	≥100	120
Table Size	L-R	mm	550	630	800	900	1000	1200	1200	1400	2000	2000	2000	2500	2500	3000	3500	4000
	F-B	mm	630	630	800	900	1000	1200	1200	1400	1600	1600	1800	2000	2000	2500	2500	2600
Table High Above Floor	mm	700	700	550	550	650	700	600	500	500	300	300	200	200	200	200	200	
Overall Dimensions	L-R	mm	2370	2370	1150	3200	5400	3180	3785	4070	4380	4800	7010	5690	6500	6870	7630	8530
	F-B	mm	900	900	800	900	1500	1200	1200	1648	2150	2854	3000	3450	3900	2500/4500	5000	4000
	High Above Floor	mm	2770	2770	2600	4085	4740	4570	4667	5348	5300	5400	5740	6680	7500	7500	7840	8500
Motor Power	KW	7.5	7.5	11	15	15	22	22	30	45	60	75	60	70	90	120	170	

/ OPTIONAL EQUIPMENT

