


/ FEATUERS



- Adopt gantry frame type structure, welded by high quality steel plate.
- The forged steel is quenched and treated, with high hardness and long service life.
- Polished and chromed with high rigidity treatment.
- Adjustable opening height (daylight).
- Check the hydraulic oil volume and temperature.
- The main seal of the cylinder adopts high quality seal ring to ensure reliable sealing.
- There are T-slots on the working table and slider, which are convenient for mold installation.

/ MAIN FUNCTIONS

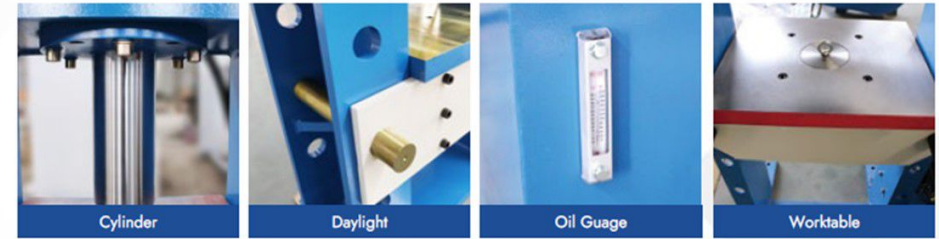

/ OPTIONAL EQUIPMENT



SPECIFICATION

• YL H-FRAME HYDRAULIC PRESS

Model		YL-20T	YL-20TK	YL-40T	YL-40TK	YL-60T	YL-60TK	YL-100T	YL-100TK
Nominal Force	KN	200	200	400	400	600	600	1000	1000
Stroke	mm	200	200	200	200	200	200	350	350
System Pressure	Mpa	25	25	30	30	30	30	25	25
Working Table Size (Left And Right)	mm	360	400	400	400	400	400	440	440
Working Table Size (Front And Back)	mm/s	400	460	460	460	490	490	650	650
Down Speed	mm/s	15	40	6	45	6	45	6	16
Return Speed	mm/s	23	50	8	60	8	60	8	20
Motor Power	KW	2.2	4	2.2	7.5	2.2	7.5	7.5	7.5