

/ STANDARD EQUIPMENT



All Copper Tile



Opening Adjustment



Forged Steel Gear




Lubrication System



Inclinable Structure



Operation Buttons

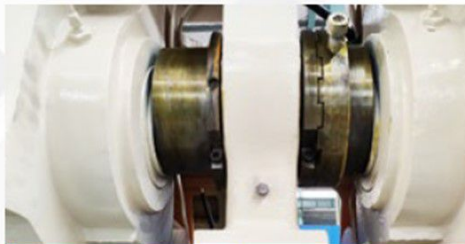

Stroke Adjustment




Pneumatic Clutch



/ OPTIONAL EQUIPMENT



Punch Mold



Light Curtain

SPECIFICATION

• JE23 PUNCHING MACHINE

Model		JE23-6.3T	JE23-10T	JE23-16T	JE23-25T	JE23-40T	JE23-63T	JE23-80T	JE21-100T	JE21-125T	JE21-160T
Nominal Force	KN	63	100	160	250	400	630	800	1000	1250	1600
Slide Stroke	mm	0-40	0-60	0-70	0-80	20-120	20-120	10-130	16-140	16-140	16-140
Number Of Stroke	Times/min	150	140	100	70	50	50	45	38	40	35
Closed Height	mm	200	200	250	290	380	380	410	590	420	410
Closed Height Adjustment	mm	30	40	40	40	60	60	60	100	60	80
Throat Depth	mm	130	130	180	200	250	280	280	320	320	360
Column Distance	mm	160	170	200	230	320	350	360	400	430	330
Table Size	Front And Back	mm	200	230	280	330	420	450	500	600	600
	Left And Right	mm	350	370	450	530	640	700	750	900	980
Slide Bottom Size	Front And Back	mm	140	100	130	170	190	220	280	350	340
	Left And Right	mm	140	145	180	200	250	310	300	425	420
Shouk Dimension	Diameter	mm	30	30	35	40	50	60	60	70	80
	Depth	mm	45	50	60	60	100	100	100	100	110
Thickness of Table	mm	30	30	40	45	70	80	90	100	110	110
Dimension	Front And Back	mm	700	740	900	1000	1400	1500	1600	1800	1800
	Left And Right	mm	550	600	780	830	1100	1200	1300	1300	1600
	Height	mm	1450	1500	1720	1950	2300	2400	2600	2650	2900
Motor	KW	1.1	1.5	2.2	2.2	3.0	4.0	7.5	7.5	11	15
Weight	KG	300	350	700	1100	2400	3100	4000	5000	7300	9600

• J21 is for the fix table, J23 is for the inclinable table.