

ALUMAT® with 3M mat insert

Alumat entrance matting system acts as the most effective option in preventing dirt, dust and moisture from entering into internal building space. Due to different environmental conditions, the usage of matting system differs. With our extensive experiences in research and development, we are able to deliver the latest customization matting system to meet your requirement with our various range of 3M matting inserts.

Features


- Superior and classy aesthetics look
- Fire-retardant as an added safety measures
- Excellent dirt trapping and moisture absorbing
- Easy installation and maintainance
- · Unique dual-fiber design
- Large crust-resistant polypropylene fibers that scrape, remove and hide loose dirt
- Fine nylon fibers that wick away water from footware and wheeled traffic



TESTED & PASSED OAS by SIRIM Malaysia

- 1) Slip Resistant (BS 5395-1: 2010 Clause 7)
- 2) Rolling Load
- 3) Flexural Properties (DIN EN ISO 178)



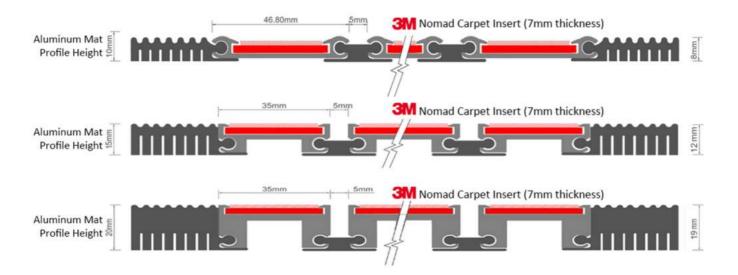

Description	Measurement
Aluminum Mat Profile Height	10mm (medium duty) / 15mm (heavy duty) / 20mm (extra heavy duty)
Nomad™ Carpet Insert Width	31 mm
Aluminum Panel Width	Refer profile above
Space Between 2 Panels	5mm
Total Mat Insert Height	7mm

Your choice to the new 3M insert aluminum mat system.

3M Nomad Matting 4900











3M Nomad Matting AQUA 85











			Product Features
	120	CC -	 Large fibres to remove dirt.
	- design	10560	Small fibres to absorb excess water.
20	200	200	 Loops arranged in a random pattern to hide more soil
			 Solid vinyl backing

Technical Data - 3M Nomad Aqua 85	
Positioning	Indoor
Construction	Turfed loop pile
Pile material	Polyamide
Pattern	Random
Backing	Vinyl
Total thickness, ISO 1765	8.0mm

Technical Data – 3M Nomad 4900		
Positioning	Indoor	
Construction	Turfed loop pile	
Pile material	Polypropylene	
Pattern	Random	
Backing	Vinyl Plastic	
Total thickness, ISO 1765	9.0mm	





- 3M Safety Walk
- 3M Matting Solutions
- 3M Solar Window Film
- 3M FASARA Glass Finishes
- 3M DICHROIC Glass Finishes
- 3M DI-NOC Architectural Finishes
- 3M Safety & Security Window Film
- 3M Automotive Paint Protection Film
- 3M CRYSTAL Dusted & Frosted Glass Finishes



Active Vibrant Sdn. Bhd.

No.4, Ground Floor, Jalan TKK 2/2, 47180 Puchong, Selangor Darul Ehsan, Malaysia Tel +603 - 80701771

+6019 - 314 2913

+6012 - 337 2829

Email avsb3m@yahoo.com

Website www.activevibrant.com.my