

WALK THROUGH METAL DETECTOR

ZK-D1065S

6 Zones Standard

Features

- Six mutual over-lapping detecting zones, Simultaneous alarm from multi- zones
- Sensitivity adjustable: Each zone has 100 sensitivity levels
- Sound & LED alarm: Both Side LED indicator ,easily show where the metal is.
- Automatically count passengers and alarm times
- Alarm strength indicator on control panel
- Password protection, only the authorized person can operate.
- Easy assembly: designed with only 2 pieces cables and 8 screws, simply-to-follow instruction.
- Harmless to human body: is harmless with heart pacemaker, pregnant women, magnetic floppy, recording tapes, etc.
- Using high density fireproof material
- Program Self-diagnostic when power on,no need initial or periodic calibration
- Modularization design,easy for maintenance and replacement.
- Sensitivity Test piece: Coin, omnidirectional detection
- 4-8 hours backup battery (Option)



Specification

| | |
|-------------------------------|-----------------------------|
| Power Supply | AC85 V-264 V |
| Working temperature | -20 °C --+50 °C |
| Working Frequency | 4KHZ—8KHZ |
| Standard External size | 2200mm(H)X800mm(W)X580mm(D) |
| Standard Internal size | 2010mm(H)X700mm(W)X500mm(D) |
| Package size for door panels | 2260*650*260mm *1ctn |
| Package size for control unit | 780*390*250 mm*1ctn |
| Gross weight | 70KG |

Application



Airport



Government office




Bank



Exhibition center



Hotel

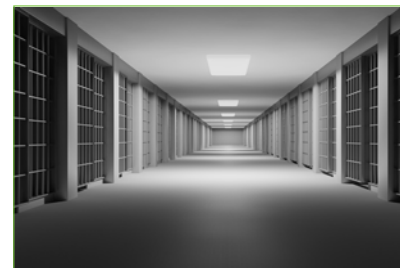

Prison



ZKTeco Middle East
www.zkteco.me
E-mail: zk_me@zkteco.com

© Copyright 2016. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

