



## GENERAL PURPOSE ELECTRIC THERMOSTATS




### ELECTRICAL DIAGRAM

Normal Version ST.

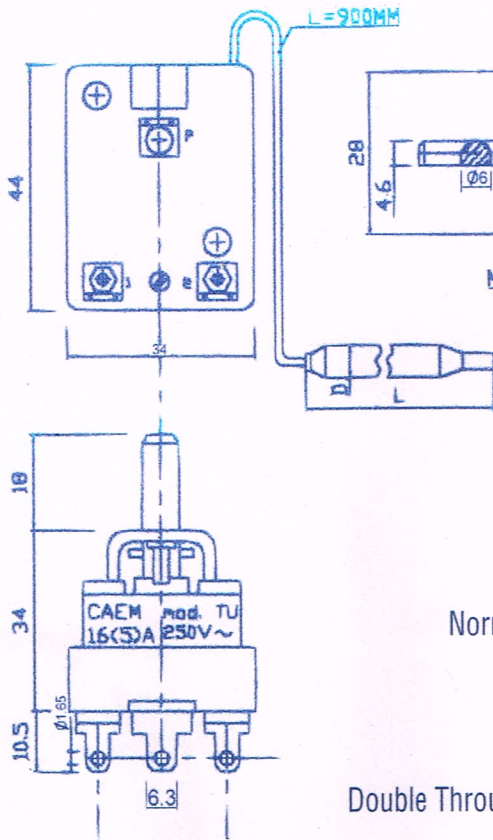

Double Through Version DT.



| CAT. NO               | TEMPERATURE RANGE | MAX WORKING TEMP ON THE THERMOSTAT | MAX WORKING TEMP ON THE BULB | DIMENSION OFF COPPER BULB (MM) |     | DIMENSION OFF STAINLESS-STEEL BULB (MM) |     | LUNGHEZZA LENGHT |
|-----------------------|-------------------|------------------------------------|------------------------------|--------------------------------|-----|---|-----|------------------|
|                       |                   |                                    |                              | L                              | Ø   | L                                       | Ø   |                  |
| TU-F,SPST 30-80       | 30°C-80°C         | T100                               | 120°C                        | 100MM                          | 6MM |   |     | 900MM            |
| TU-V,SPDT 30-110      | 30°C-110°C        | T100                               | 121°C                        |                                |     | 112MM                                   | 5MM | 900MM            |
| TU-V,SPDT 4-40        | 4°C-40°C          | T80                                | 44°C                         |                                |     | 180MM                                   | 5MM | 900MM            |
| TU-V,SPDT 50-220      | 5°C-220°C         | T150                               | 231°C                        |                                |     | 121MM                                   | 5MM | 900MM            |
| TU-V,SPDT 50-300/900  | 50°C-300°C        | T150                               | 315°C                        |                                |     | 175MM                                   | 3MM | 900MM            |
| TU-V,SPDT 50-300/1400 | 50°C-300°C        | T150                               | 315°C                        |                                |     | 175MM                                   | 3MM | 1400MM           |
| TU-V,SPDT 50-300/1500 | 50°C-300°C        | T150                               | 315°C                        |                                |     | 175MM                                   | 3MM | 1500MM           |
| TU-V,SPST 30-110      | 30°C-110°C        | T100                               | 121°C                        |                                |     | 112MM                                   | 5MM | 900MM            |
| TU-V,SPST 50-300/900  | 50°C-300°C        | T150                               | 315°C                        |                                |     | 175MM                                   | 3MM | 900MM            |