



## ACM MOTOR HEATER TAPES

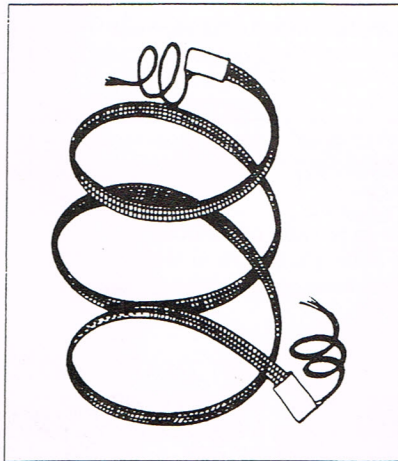

The ACM range of electric heating tapes has been designed to prevent condensation within rotating electrical equipment such as electric motors, generators and large alternators.

CAT No.	WATTS	LENGTH (mm)
ACM0BF	25	305
ACM1BF	26	432
ACM2BF	21	686
ACM3BF	40	686
ACM4BF	26	762
ACM5BF	42	1016
ACM6BF	54	1067
ACM7BF	65	1473
ACM8BF	99	1702

## PCS / FG

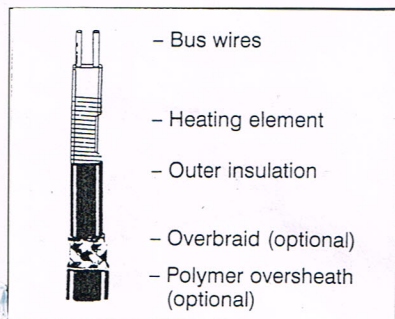


PCS is a parallel circuit constant power cut-to-length tape for use in industrial applications for process maintenance to 140°C.

CAT No.	RATING
PCS215	15w/metre
PCS220	20w/metre
PCS230	30w/metre
PCS240	40w/metre
PCS250	50w/metre
PCS260	60w/metre
PCSK	Termination Kit

Bending Radius — 10mm min.  
 Dimensions — ~~12mm~~ wide 9.5mm  
 — 6.5mm thick

## ISL/FROSTGUARD

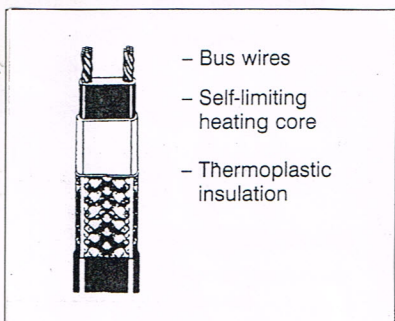


ISL is a self-limiting cut-to-length heat tape for frost protection and low process temperature applications in non-hazardous areas.

CAT No.	RATING
ISL2/10	10w/metre
ISL2/16	16w/metre
ISL2/26	26w/metre
ISL2/30	30w/metre

Maximum temp. — 65°C.  
 Bending Radius — 20mm min.  
 Dimensions — 9mm wide x  
 3.5mm thick

## KDL DRAIN LINE HEATING

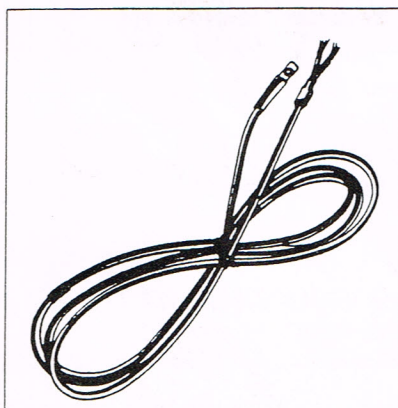

The KDL range of low wattage heating tapes has been developed for the internal and external tracing of drainlines in cold stores, refrigeration rooms and equipment. They are factory fitted with 500mm cold lead terminations. Temperature range: -40°C to 180°C.

CAT No.	LENGTH (m)	WATTS
KDL1	1.0	40
KDL2	2.0	80
KDL3	3.0	120
KDL4	4.0	160
KDL5	5.0	200
KDL6	6.0	240