



# HQ HEATING SDN BHD (702148-U)

NO. 69, Jalan Laksamana 6, Off Jalan Sungai Jati,  
Taman Sentosa, 41200 Klang Darul Ehsan, Malaysia.  
Tel : 603 - 5162 7010 / 5162 1111 Fax : 603 - 5162 7011  
Email : hqheating69@tm.net.my Website : www.hqheating.com.my

## ISOPAD

### FG220 ( Constant wattage parallel circuit heating cable for ordinary area use)


FG220 is a parallel circuit, medium powered constant output tracer that can be cut to any length . FG220 incorporates a high temperature silicone rubber outer insulation that provides an extremely flexible and versatile versatile heating cable that is suitable for a variety of applications.

Its is designed for high temperature process maintenance applications in non chemically aggressive enviroment.

it has twin conductors with extruded high quality, high temperature silicone rubber primary insulation.


The heating element is zone connected to the conductors and over sheathed with a further layer of high temperature silicone rubber secondary insulation. A stainless steel overbraid is available as an option.

### Heating cable construction

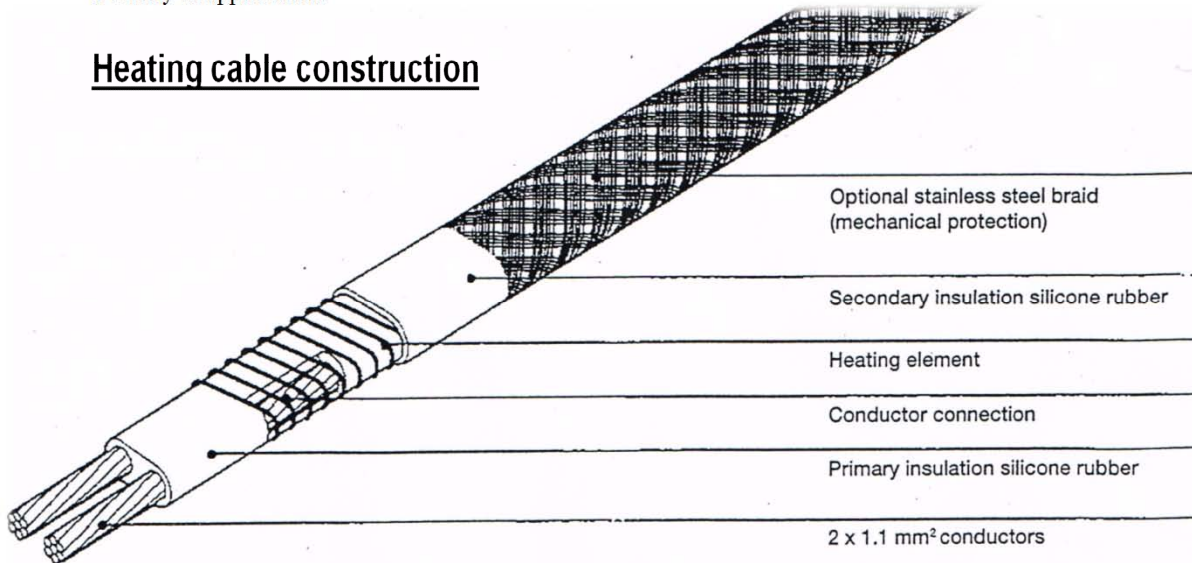

	FG220 10 W/m	FG220 20 W/m	FG220 30 W/m	FG220 40 W/m
Size mm (unbraided cable) (braided cable)	6.0 x 9.5 6.5 x 10.0	6.0 x 9.5 6.5 x 10.0	6.0 x 9.5 6.5 x 10.0	6.0 x 9.5 6.5 x 10.0
Specification				
Nominal power output (230V) (110V)	10 W/m 10 W/m	20 W/m 20 W/m	30 W/m 30 w/m	40 W/m not available
Supply voltage (AC)	230V or 110V	230V or 110V	230V or 110V	230V
Area classification	Ordinary	Ordinary	Ordinary	Ordinary
Max. circuit length (230V) (110V)	160 m 80 m	100 m 50 m	90 m 40 m	60 m not available
Max. withstand temperature (de-energised)	220 (DEG CEL)	220 (DEG CEL)	220 (DEG CEL)	220 (DEG CEL)
Max. work piece temperature (energised)	165 (DEG CEL)	150 (DEG CEL)	135 (DEG CEL)	95 (DEG CEL)
Min. installation temperature	-50	-50	-50	-50
Min. bend radius	20 mm	20 mm	20 mm	20 mm
Min. spacing between turns	10 mm	10 mm	10 mm	10 mm
Colour	Red	Red	Red	Red
Cold lead / heating zone Length (230V) (110V)	1.30 m 0.75 m	1.00 m 0.75 m	1.00 m 0.75 m	1.00 m not available

## Wiring diagram

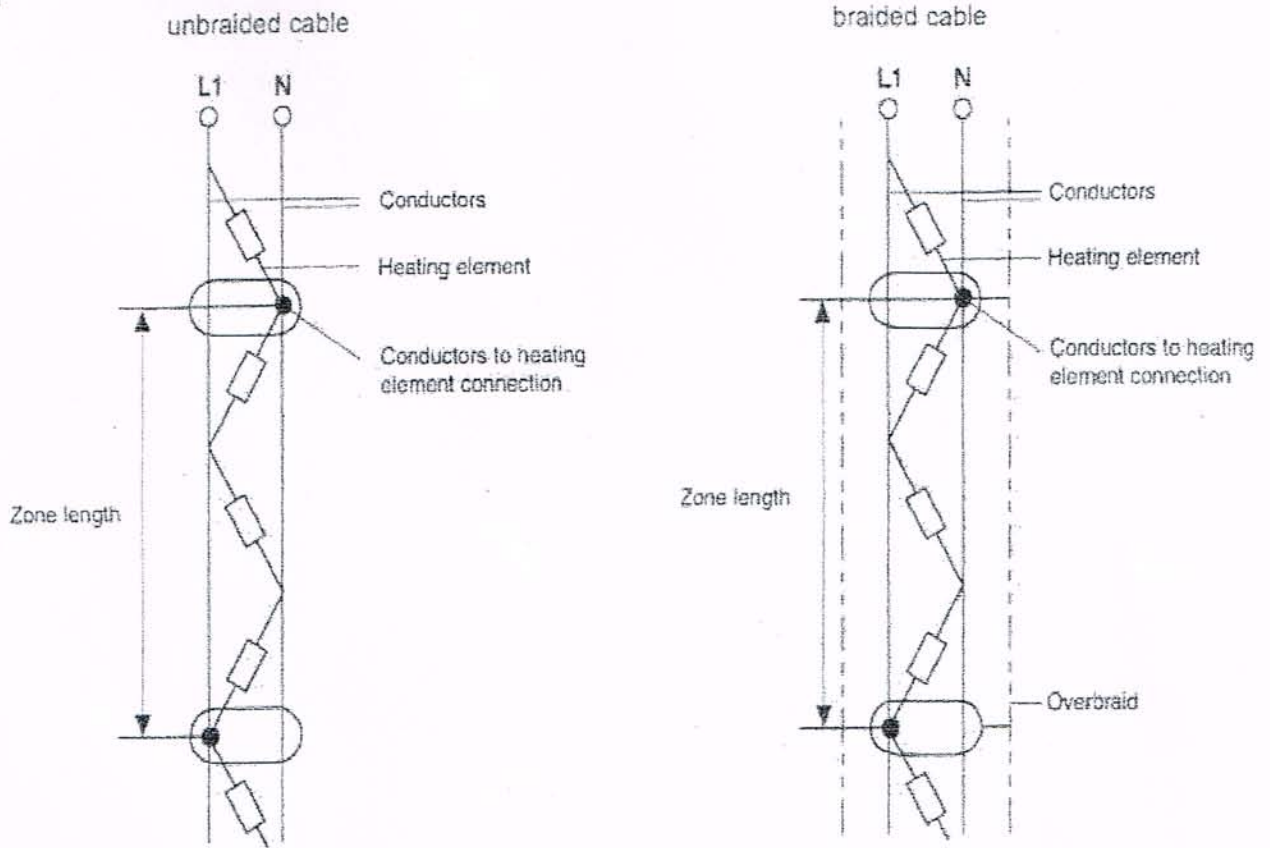

## Ordering details

		<b>FG220 10 W/m</b>	<b>FG220 20 W/m</b>	<b>FG220 30 W/m</b>	<b>FG220 40 W/m</b>
Part description	(230V)	FG220-10W/M-230V	FG220-20W/M-230V	FG220-30W/M-230V	FG220-40W/M-230V
(unbraided cable)	(110V)	FG220-10W/M-110V	FG220-20W/M-110V	FG220-30W/M-110V	not available
		10 W/m	20 W/m	30 W/m	40 W/m
Part No.	(230V)	794 532-000	068 360-000	199 864-000	327 464-000
	(110V)	300 650-000	495 544-000	961 992-000	not available
Part description		FG220-B/SS-10W/M-230V	FG220-B/SS-20W/M-230V	FG220-B/SS-30W/M-230V	FG220-B/SS-40W/M-230V
(braided cable)		FG220-B/SS-10W/M-110V	FG220-B/SS-20W/M-110V	FG220-B/SS-30W/M-110V	not available
		10 W/m	20 W/m	30 W/m	40 W/m
Part No.	(230V)	909 930-000	556 828-000	458 312-000	291 534-000
	(110V)	972 820-000	614 012-000	394 730-000	not available

## Accessories

## Unbraided cable

Part description TSL-TTK1/M20 (cold applied connection and end seal kit - M20 version)

Part No. 315 438-000

## Braided cable

Part description TSL-TTK1/B/M20 (cold applied connection and end seal kit - M20 version)

Part No. 981 490-000

Tyco Thermal Controls requires the use of a 30 mA residual current device to provide maximum safety and protection from fire. Where there is a marked increase in nuisance tripping, a maximum 300 mA residual current device may be used.