



HQ HEATING SDN. BHD. (702148-U)


No. 69, Jalan Laksamana 6, Off Jalan Sungai Jati, Taman Sentosa,
41200 Klang, Selangor Darul Ehsan, Malaysia

Tel: 603-516271111; Fax : 603-51627011

Email:hqheating69@gmail.com ; Website:hqheating.com.my

HQMS SERIES FINNED HEATERS

- SHEATH WATT DENSITY 84 KW/M² (54 W/in²)
 OPERATING TEMPERATURE Maximum permissible temperature of element when
 operating is 400°C in air with an ambient temperature of 20°C
 and velocity of 2.5 meters/sec.
- CONSTRUCTION : Continuous spiral stainless steel fins to 12mm dia stainless
 steel sheath tubular element .Dia over fin 29mm .Finning pitch
 6mm.
- FINISH : Natural
- MOUNTING : Nickel plated brass bush M18 tread clearance hole of 19mm
 required nut and washers included.

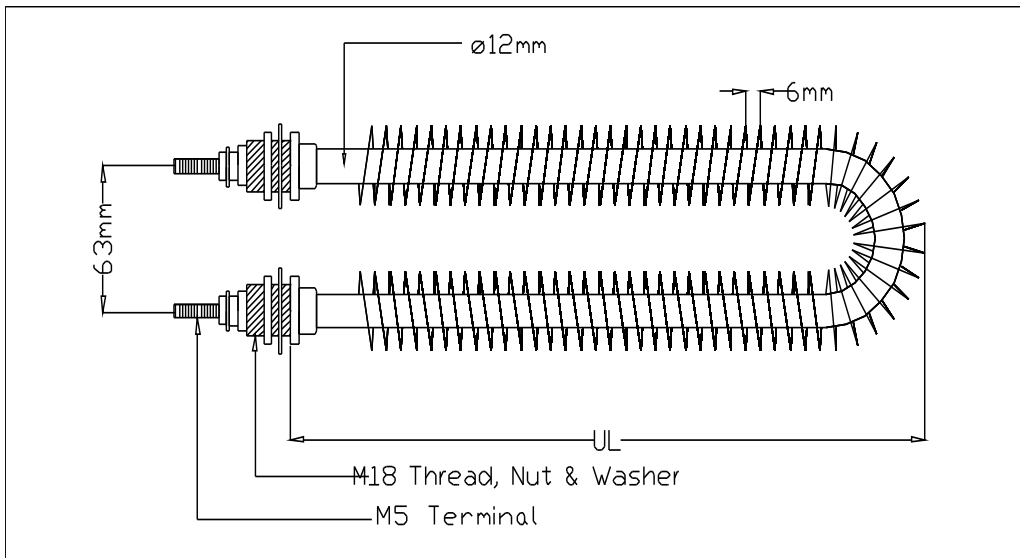

HQMS-U' FORM FINNED HEATER			
MODEL NO	WATTS(W)	VOLTS(V)	UL(mm)
HQMS033U240	333	240	180
HQMS100U240	1000	240	204
HQMS150U240	1500	240	284
HQMS175U240	1750	240	324
HQMS200U240	2000	240	358
HQMS250U240	2500	240	440
HQMS300U240	3000	240	524
HQMS350U240	3500	240	603
HQMS400U240	4000	240	683
HQMS450U240	4500	240	758
HQMS500U240	5000	240	840