



GH-38S



GH-45S

φ45



GH-62S

φ62

Model	Vib.head dia.x length	Rubber hose length	Rubber hose dia.	Flexible shaft dia.	Amplitude	Vibration	Shaft set weight
GH-38S	38 X 480mm	6m	31mm	9.5mm	1.8mm	150-208Hz (9,000-12,500V.P.M)	6m 15.7kg
GH-45S	45 X 494mm	6m	31mm	9.5mm	2.0mm	150-208Hz (9,000-12,500V.P.M)	6m 17.4kg
GH-62S	62 X 479mm	6m	32mm	12.7mm	2.4mm	150-208Hz (9,000-12,500V.P.M)	6m 23.5kg


PORTABLE CONCRETE VIBRATOR



MGX-38

MGX-28

MGZ-F100A

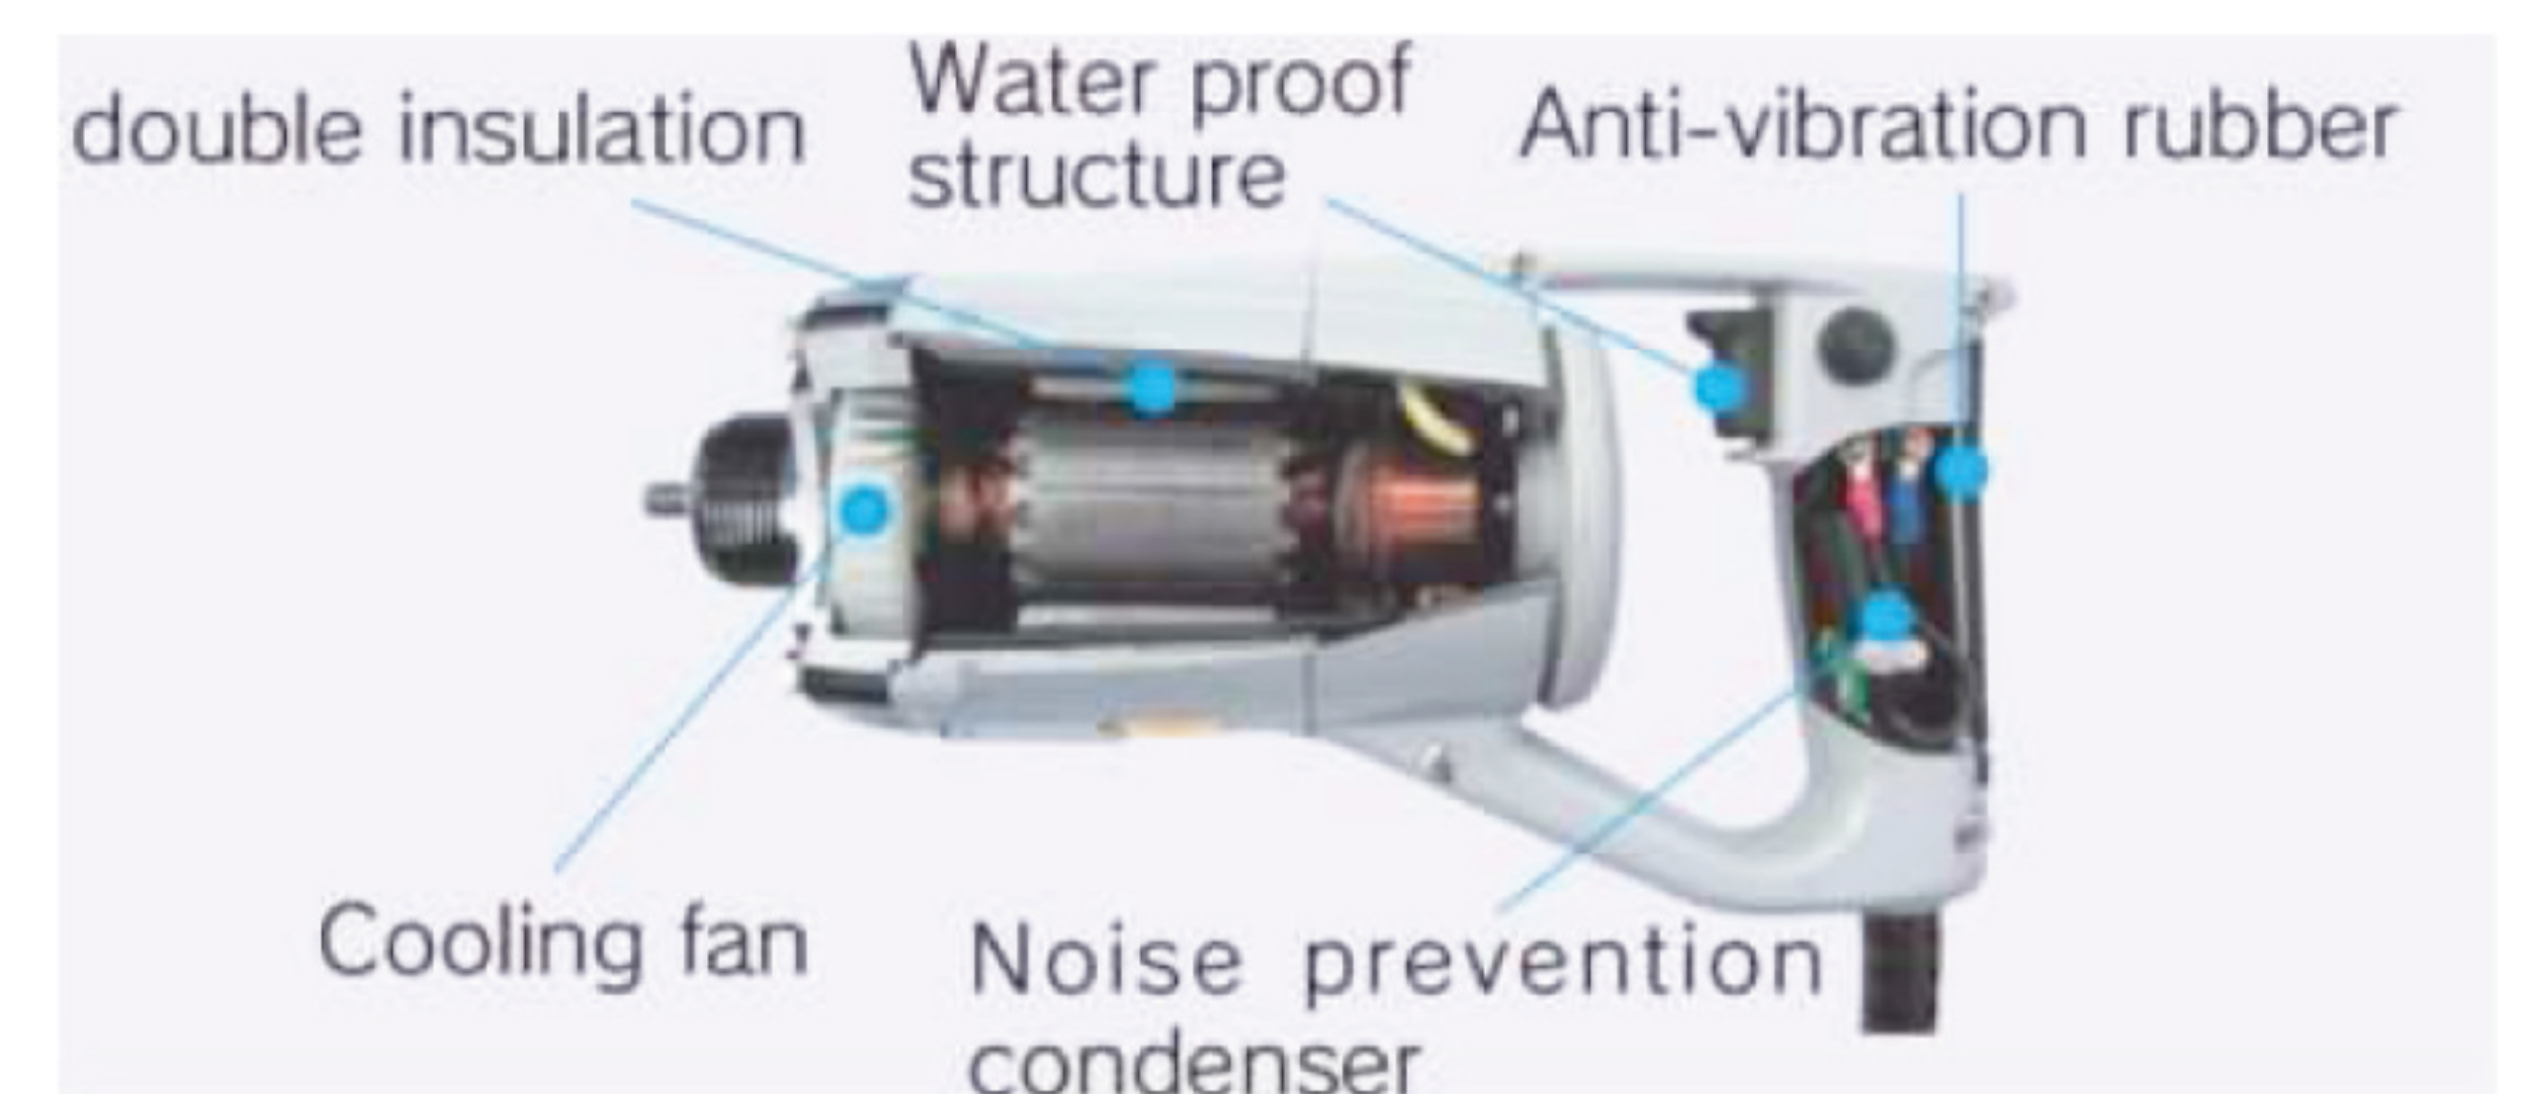

(front surface sealed motor)

Features

- ✓ Handle part is a split type, and the anti-vibration rubber on the surface where your hand will touch serves to reduce fatigue.
- ✓ Wear resistant cover is placed on the switch lever and stopper areas to prevent entry of concrete and water.
- ✓ Most suited for casting of stone masonry, side ditch, building foundation and concrete products.

Model	Vib.head dia. x length	Vibration Board size	Vibration	Power (Single Phase)	Weight (kg)
MGZ-F100A	395 X 78mm	78mm x 100mm	166Hz-200Hz (10000-12000 V.P.M)	output:280W	5
MGX-28	28 X 1180mm	8mm	200Hz-285Hz (12000-15500 V.P.M)	output:280W	4.6
MGX-38	38 X 1180mm	8mm	200Hz-285Hz (12000-15500 V.P.M)	output:280W	5.1