

MRH-601DS

Mikasa vibration roller use hydraulic pump and hydraulic motor drive systems for precise navigation and easy maintenance. Standard equipment: Front safety bumpers, working of light, plastic water tank, center cover, deadman safety lever, hydraulic oil and fuel gauge and double vibration system.



Model	Dimensions	Drum Size	Vibrating Frequency	Centrifugal Force	Traveling Speed	Limited grade-ability	Water tank (lits)	Power source
MRH-601 DS (Water cooled)	H : 1,195mm W : 692mm L : 2,265mm WT: 551kg	Dia : 355mm Width : 650mm	55Hz (3,300V.P.M)	10.8kN (1,100kgf)	0-3km/h	35%	30	Kubota diesel EA330 electric start max.output 4.6kW(6.3PS)

REVERSIBLE COMPACTOR



MVH-308DSY



Cyclone cleaner



Cover Open

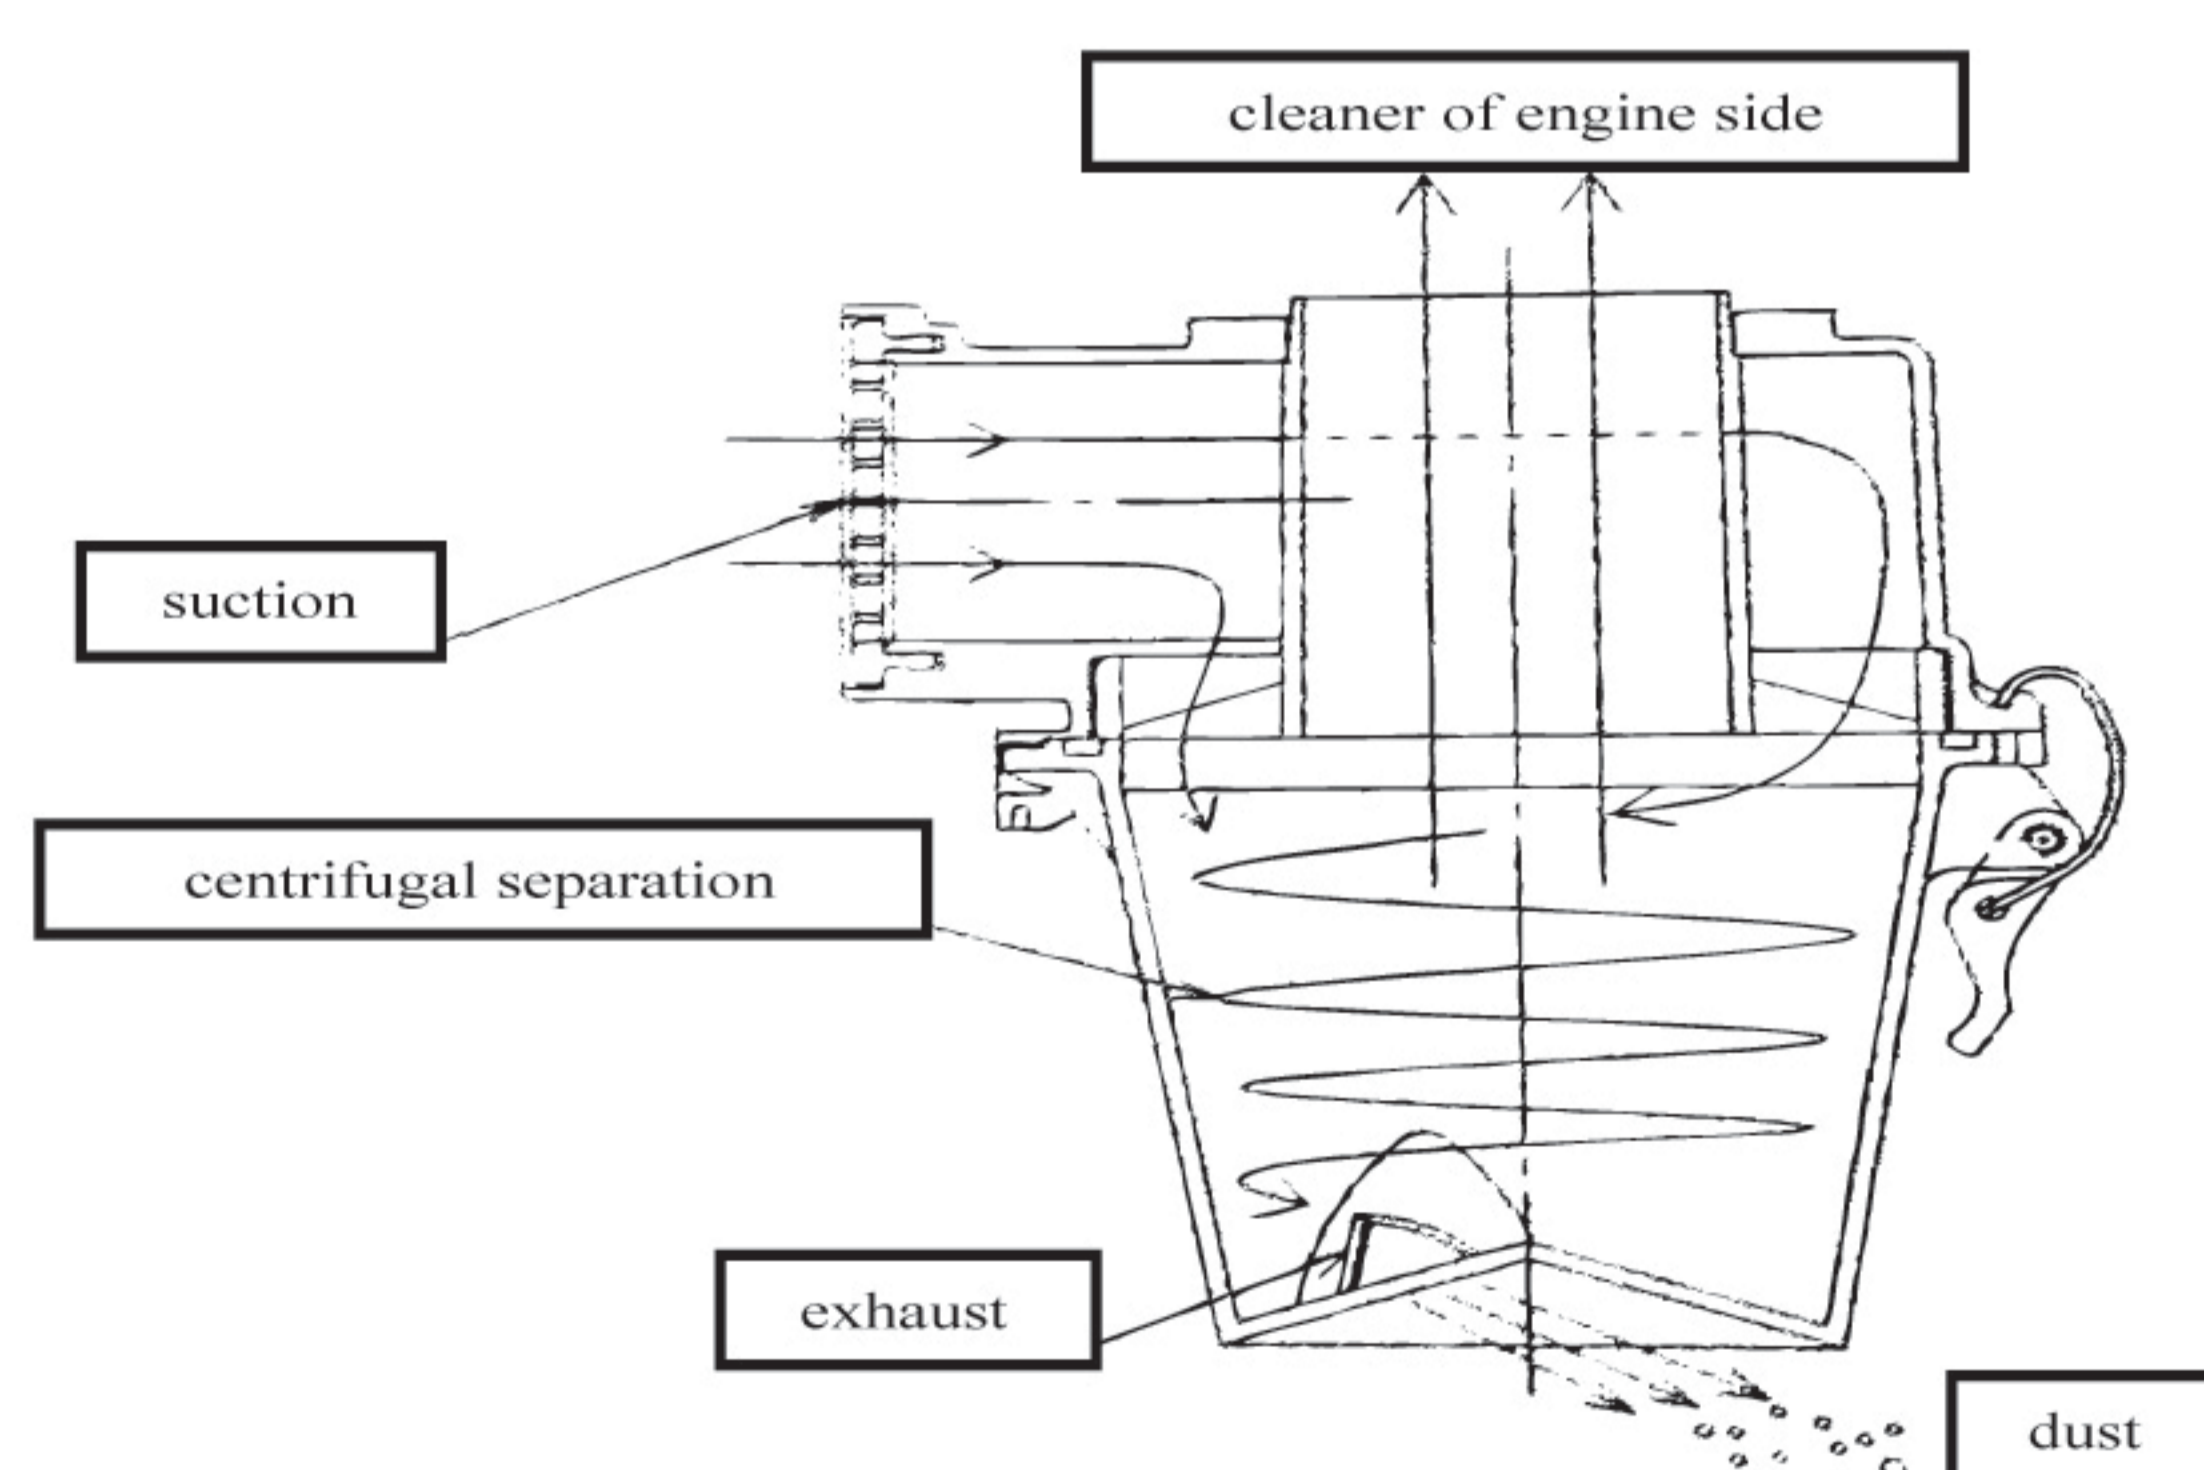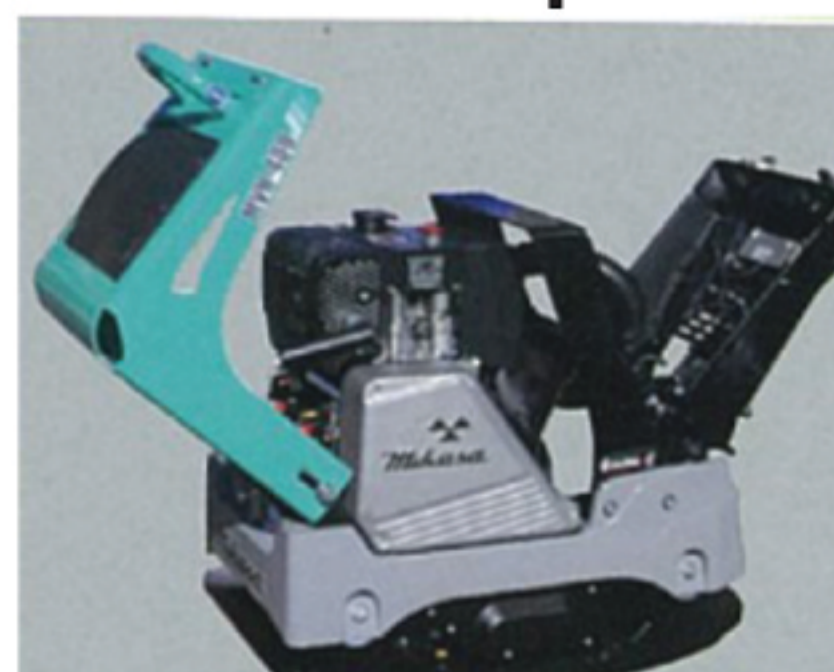

FEATURES

- ✓ Models equipped with diesel engines are silent-type reversible compactors installed with sound absorbing materials in the guard frame. (MVH-150D through MVH-502DSB)
- ✓ All models comply with the EU Noise Emission Directive 2005/88/EC (2004/14/EC)

Model	Dimensions	Plate Size	Weight	Power Source
MVH-308DSY	H: 1030mm L: 1540mm	W: 445mm (595mm) L: 860mm	341kg	Yanmar L70N diesel (electric start) max.output 4.9kW (6.7PS)