

■ REGENT 3

ADVANTAGES

- High performance
- Light weight
- Easy maintenance

APPLICATION

- Sports Field, Indoor Arena
- Area Lighting, Airport Apron Lighting
- Monumental, Building, Recreation

FEATURES

- Die cast aluminium housing with cooling fins
- Epoxy powder paint finish
- Standard colour - Black
- Resistant to corrosive environment
- High reflectance; anodised and polished aluminium reflector
- Tempered glass, resistant to thermal shock and impact
- Stainless steel clips and silicon rubber sealing gaskets
- Symmetrical beam
- Ceramic lamp holder and silver plated contact – Standard E40

CHARACTERISTICS

- Optical assembly : IP 65
- Ballast Compartment : IP 65
- Electrical Insulation : Class I
- Voltage : 220V / 240V
- Wattage : 700~1000W
- Lamp type : HPSV, MBF & MH
- Lamp holder type : E 40
- Dimensions (mm) : 450(L) x 160(W) x 510(H)
- Approx. net weight : 12~14kg (w/o controlgear)


■ REMOTE CONTROL GEAR

APPLICATION

- Remote control gear application

FEATURES

- Die cast aluminium housing.
- Corrosion - resistant powder paint finish.
- Standard colour - Black.
- Gear tray/PG gland included.
- Weatherproof and durable silicon rubber gasket.
- Stainless steel screw.

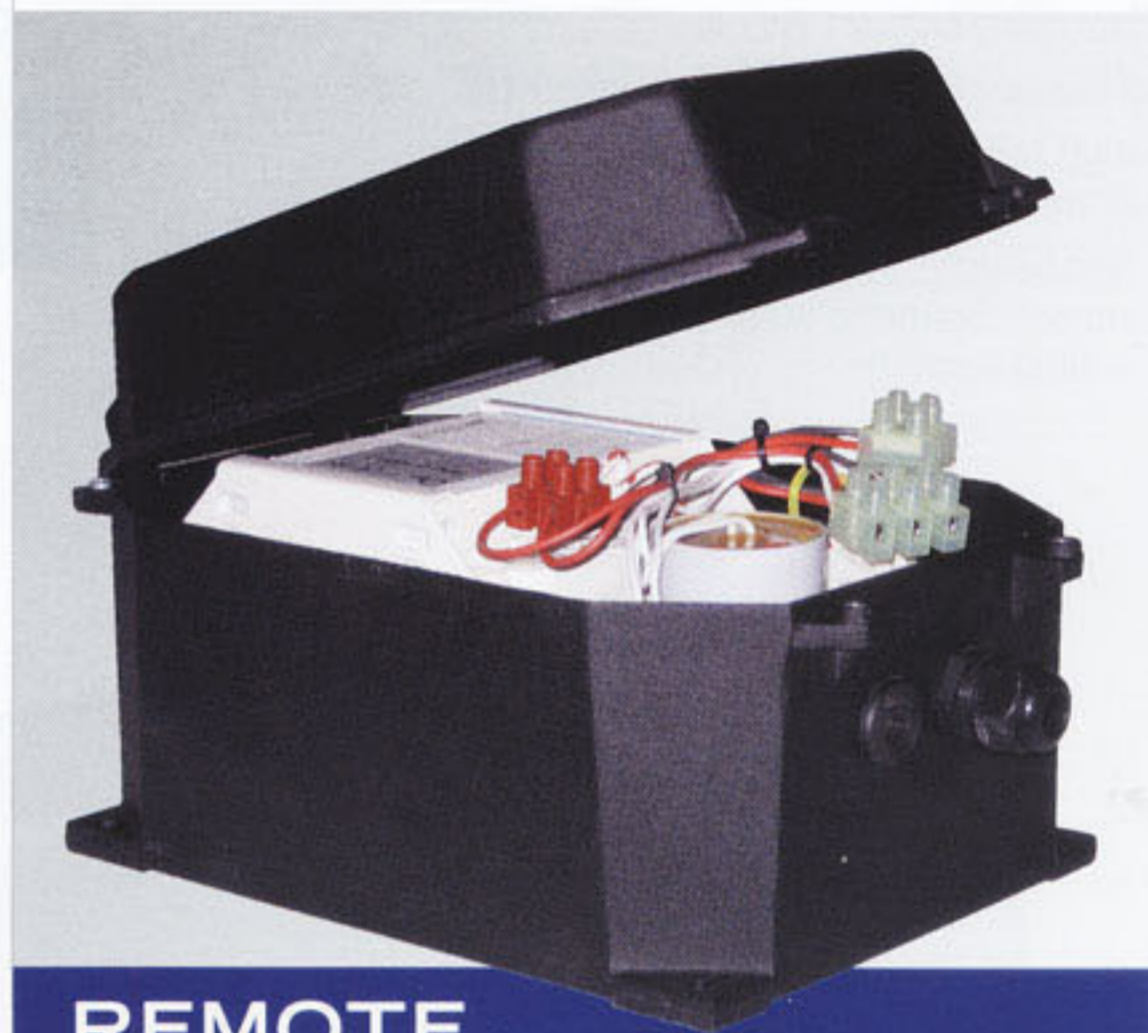

REMOTE CONTROL GEAR

CHARACTERISTICS

- Ballast Compartment : IP 65
- Electrical Insulation : Class 1
- Voltage : 220V~240V
- Wattage : 400W~1000W
- Lamp type : H.P. Sodium, MBF or M/Halide
- Dimensions (mm) : 290(L) x 205(W) x 185(H)
- Approx. Net weight : 6~20 kg