

# UEBERALL

## Cartridge Filter Housing

### UCF-325

5 – 25 m³/h

#### TECHNICAL DATA SHEET



- For **Filtration** of drinking or process water
- Fitted with high quality filter cartridges
- Stainless Steel pressure filter with bumped top and bottom, WIG 141 welded from Material 1.4301 (304)
- Removable top with swing bolts for easiest service
- Tool free cartridge replacement
- Industrial execution – PN 10 bar

		325-7	325-14	325-21	325-28
Max. flow rate @ 5 µ cartridge mesh size	[m³/h]	6	12.5	19	25
Operational pressure / test pressure	[Bar]	10 / 15			
Pressure drop	[Bar]	< 1			
Design Temperature	[° C]	80			
DIN Flange connections inlet and outlet	[DN]	25	40	50	50
No. of Filter Cartridges 10"	[Pcs.]	7	14	21	28
Volume	[ L ]	23	34	45	55
Weight dry	[ kg ]	30	35	40	46
Material Filter housing	Stainless Steel 304 (1.4301)				
Surface finish	Electro polished				
	Bigger sizes on request!				

Filter comes including:

- 1 pce. Pressure gauge with root valve
- Initial set of filter cartridges, seperately packed
- Workshop test certificate acc. EN 10204 3.1 B




# UEBERALL

## Cartridge Filter Housing UCF-325

5 – 25 m<sup>3</sup>/h

### DIMENSIONAL DRAWING

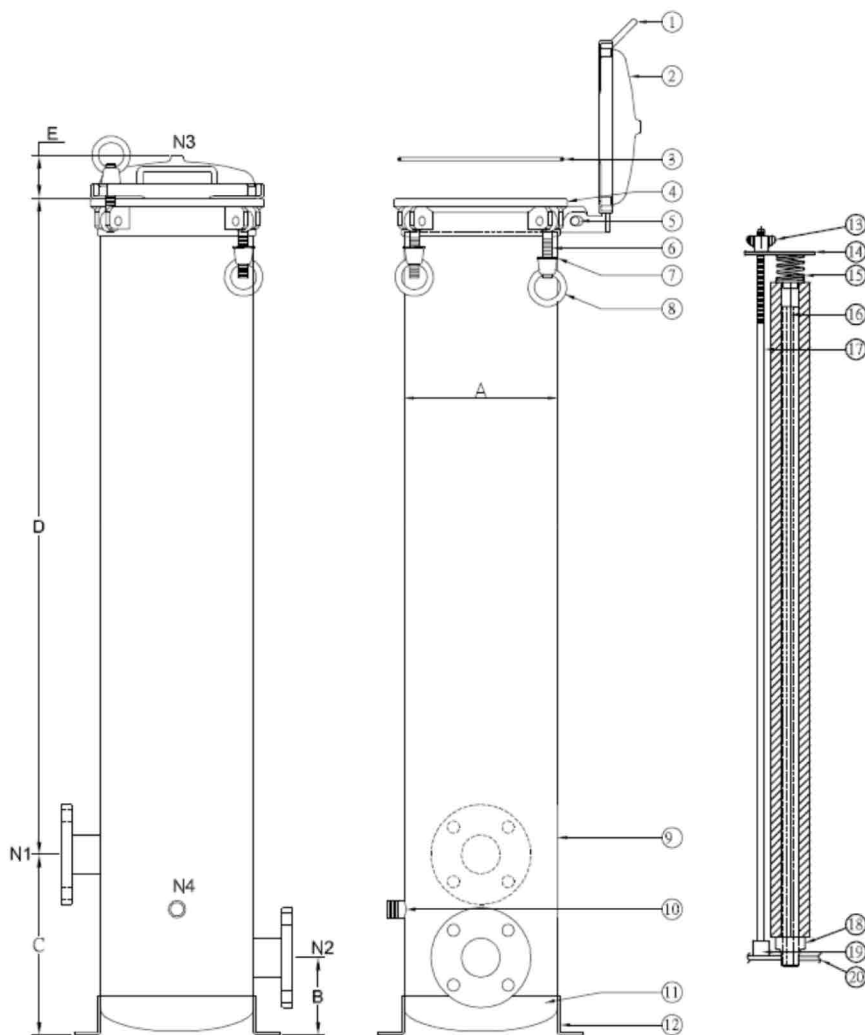

DIMENSIONS		325-7	325-14	325-21	325-28
A	[mm]	238	238	238	238
B	[mm]	120			
C	[mm]	280			
D	[mm]	253	508	763	1018
E	[mm]	65			
F	[mm]	358			

