

Specification

TYPE OF CLAMP	SINGLE	DUAL	TRIPLE	QUAD
WITH SIZE	70 mm	148 mm	210 mm	272 mm
PIPE DIAMETER	38-930 mm	38-930 mm	38-930 mm	38-930 mm
PRESSURE RATING	16 BAR**	16 BAR**	16 BAR**	16 BAR**
TEMPERATURE SEAL MATERIAL NITRILE	(-20°C) TO (115°C)	(-20°C) TO (115°C)	(-20°C) TO (115°C)	(-20°C) TO (115°C)

^{*} Rapid Response Clamps can be ordered individually or supplied in various quanitities. Larger sizes can be made to order. ** Up to diameter 220mm

VPG Rapid Response Clamps

Facilitate the fastest repair solution, across the world, for maintenance in all pipeline industries. Featuring an installation time of less than 60 seconds and superior design features in comparison to any competitor.

Applications

- Maritime
- Mining
- Oil and gas
- Refining
- Aviation
- Chemical
- Process Manufacturing

VPG Rapid Response Clamp Offers

- Increased personnel and asset survivability
- Reduction in potential environmental damage
- Improved protection of assets
- Improved ability to maintain production
- Lower Total Cost of Ownership


Ease of use

Only 8 different sizes are required to span the standard range of 38mm to 930mm pipe diameters. No tools are required for installation.

Quality Design

- Marine grade stainless steel body
- Nitrile seal suitable for water, gas and most petroleum liquids.

VPG CLAMP PRESSURE CHART

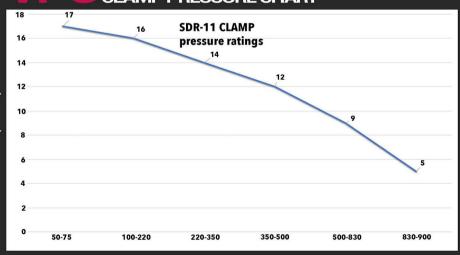



PIPE DIAMETER (IN MM)