



# INFINITY Load Link(Dynamometer)

## MODEL ILS



**Capacity : 3 , 5, 10, 20, 30 T**

**Alloy Steel -Heavy duty design  
for reliability & accuracy**

**Units : kg, lbs, kN**

- Application-lifting, pulling ,safety, testing & measuring of tensile force
- Capacity 3, 5,10,20, 30T
- Integrated load cell design for high reliability
- Accuracy 1:2000
- Display units selectable kg, kN, lbs
- 6 Digit 18mm LCD with back lighting
- 3 operation key for ease of operation
- Alloy Steel material design for heavy duty usages for reliability & accuracy
- Peak Load real-time weighing
- Overload Alarm & low battery indication
- Operation temperature -20°C ~ +45°C
- 4x AA Size Battery operation


Max. Capacity (kg)	Standard Division	Division Hi Resolution	Resolution Standard
3000	1.0	0.5	1/3000
5000	2.0	1.0	1/2500
10000	5.0	2.0	1/2000
20000	10	5.0	1/2000
30000	10	5.0	1/3000






# INFINITY Load Link(Dynamometer)

## MODEL ILS

LCD display window

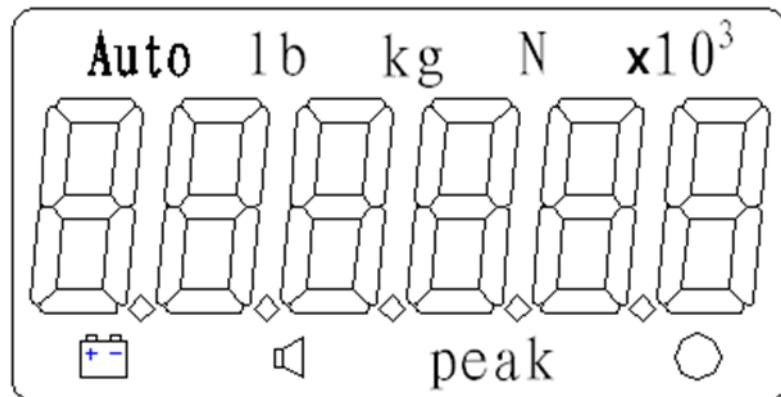

Keypad Function/Operation



Dimensions (mm)

Size	Capacity	3t	5t	10t	20t	30t
H		220	235	283	349	410
H1		170	177	203	237	270
L		115	115	115	115	120
L1		50	56	83	115	120
B		55	55	55	73	84
B1		38	38	38	56	67
E		Ø26	Ø31	Ø41	Ø56.5	Ø70.5

Nett weight (kg)

3T - 2.7kg , 5T - 3.7kg, 10T - 5.3kg

20T - 14 kg , 30T - 24kg