










## JSB EQUIPMENT PTE LTD

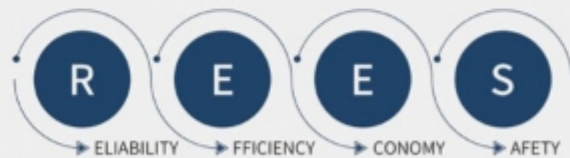

We are dedicated to taking you higher by our reliable products, to realize more efficient and economic working at Height. Our commitment doesn't end with the sale. We thrive on providing you more valuable safety equipment by strict quality control and prompt services.

Rees has obtained the international ISO9001 quality management certification. All machines have passed CE EN280 certificate.

We are dedicated to taking you higher by our reliable products, to realize more efficient and economic working at Height. Our commitment doesn't end with the sale. We thrive on providing you more valuable safety equipment by strict quality control and prompt services.

Rees has obtained the international ISO9001 quality management certification. All machines have passed CE EN280 certificate.

### Reliability:

Key parts like power unit, electrical components are from global sourcing. Excellence of these key parts guarantee the quality of REES products. We focus on improving quality and providing prompt services to make every REES equipment your reliable tool on worksite challenges.

### Efficiency and Economy:

We listen to voices from customer, and solve all troubles which you may meet from the start of our design. This makes REES aerial work platform to be a efficient and economic tool for you. The lightweight maneuverability and compact size make REES product a versatile option for a wide variety of rental, light-duty construction and maintenance applications in hotel, airport, housing property, industry workshop, warehouse...

### Safety:

All our safety features are for your work at height. Emergency stop, Double hand operation button, and outrigger interlock will prevent injuries caused by incorrect operations. Cylinder bleed proof valve and Emergency lowering button could prevent users from injury caused by machine malfunction.

# 01 AMWP6100

## REES SELF-PROPELLED VERTICAL MAST

### SELF-PROPELLED VERTICAL MAST

MODEL	AMWP3.6-6100	AMWP4.8-6100	AMWP6-6100
Max. Working Height	5.6m	6.8m	8m
Max. Platform Height	3.6m	4.8m	6m
Loading Capacity	227kg	227kg	150kg
Ext. Platform Capacity	114kg	114kg	114kg
Overall Length	1.36m	1.36m	1.36m
Overall Width	0.76m	0.76m	0.82m
Overall Height	1.7m	1.98m	1.98m
Platform Dimension	1.3m x 0.70m	1.3m x 0.70m	1.28m x 0.70m
Ext. Platform Length	0.51m	0.51m	0.51m
Wheel Base	1.04m	1.04m	1.04m
Inner Turning Radius	0m	0m	0m
Outer Turning Radius	1.4m	1.4m	1.4m
Travel Speed(Stowed)	4km/h	4km/h	4km/h
Travel Speed(Raised)	1.1km/h	1.1km/h	1.1km/h
Up/Down Speed	31/32sec	41.5/42sec	52/53sec
Gradeability	25%	25%	25%
Drive Tyres	Φ305 x 100mm	Φ305 x 100mm	Φ305 x 100mm
Drive Motors	2 x 24VDC/0.5kW	2 x 24VDC/0.5kW	2 x 24VDC/0.5kW
Lifting Motor	24VDC/1.3kW	24VDC/1.3kW	24VDC/1.3kW
Battery	2 x 12V/100Ah	2 x 12V/100Ah	2 x 12V/100Ah
Charger	24V/15A	24V/15A	24V/15A
Weight	810kg	980kg	1060kg

Effective Date: July, 2021. Product specifications and prices are subject to change without notice or obligation.



- Proportional controls
- Automatic pothole protection
- Drivable at full height
- Non-marking tyre
- Automatic brake system
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system



### SINGLE MAST VERTICAL LIFT

MODEL	GTWY1-5	GTWY1-6	GTWY1-8	GTWY1-9	GTWY1-10	GTWY1-12
<b>PLATFORM</b>						
Max. Working Height	6.7m	8.2m	9.6m	11.2m	12.4m	14m
Max. Platform Height	4.7m	6.2m	7.6m	9.2m	10.4m	12m
Loading Capacity	150kg	150kg	150kg	150kg	120kg	120kg
Occupants	1	1	1	1	1	1
Platform Dimension	0.67m x 0.66m	0.67m x 0.66m	0.57m x 0.65m	0.67m x 0.66m	0.67m x 0.66m	0.57m x 0.65m
<b>OVERALL DIMENSION</b>						
Overall Height	1.55m	1.95m	1.99m	1.99m	1.55m	2.78m
Overall Width	0.78m	0.78m	0.78m	0.78m	0.78m	0.82m
Overall Length	1.14m	1.14m	1.39m	1.4m	1.42m	1.46m
Outrigger coverage	1.7m x 1.7m	1.7m x 1.7m	1.7m x 1.7m	1.8m x 1.8m	1.9m x 1.8m	2m x 1.9m
<b>WEIGHT</b>						
AC	330kg	360kg	370kg	390kg	420kg	490kg
DC	355kg	375kg	395kg	415kg	445kg	515kg
<b>POWER</b>						
AC	380V/220V/110V	380V/220V/110V	380V/220V/110V	380V/220V/110V	380V/220V/110V	380V/220V/110V
AC Motor	0.75KW	0.75KW	0.75KW	0.75KW	0.75KW	0.75KW
DC	12V	12V	12V	12V	12V	12V
DC motor	1.5KW	1.5KW	1.5KW	1.5KW	1.5KW	1.5KW
Charger	12V/15A	12V/15A	12V/15A	12V/15A	12V/15A	12V/15A

Effective Date: July, 2021. Product specifications and prices are subject to change without notice or obligation.



FORKLIFT POCKET



EASY LOADING IN PICKUP TRUCKS



DEADMAN SWITCH



OUTRIGGER INTERLOCK



- Outrigger Interlock
- Deadman switch
- AC power on Platform
- Emergency Stop Button
- Easily Loading to pickup truck
- Emergency Lowering system
- Leveling Bubble
- Forklift Pocket
- Cylinder Holding Valve

## DOUBLE MASTS VERTICAL LIFT

MODEL	GTWY2-6	GTWY2-8	GTWY2-10	GTWY2-12	GTWY2-14	GTWY2-16
<b>PLATFORM</b>						
Max. Working Height	6m	10m	12.4m	14m	16m	18m
Max. Platform Height	6m	8m	10.4m	12m	14m	16m
Loading Capacity	250kg	250kg	250kg	200kg	200kg	150kg
Occupants	2	2	2	2	2	1
Platform Dimension	1.45m x 0.7m	1.45m x 0.7m	1.45m x 0.7m	1.45m x 0.7m	1.6m x 0.7m	1.8m x 0.7m
<b>OVERALL DIMENSION</b>						
Overall Height	1.55m	1.55m	1.93m	1.55m	2.55m	2.78m
Overall Width	0.81m	0.81m	0.81m	0.81m	0.81m	0.81m
Overall Length	1.48m	1.48m	1.48m	1.48m	1.85m	1.88m
Outrigger coverage	2.3m x 1.7m	2.3m x 1.7m	2.3m x 2.2m	2.3m x 2.4m	2.3m x 2.4m	2.3m x 2.4m
<b>WEIGHT</b>						
AC	630kg	645kg	715kg	750kg	852kg	995kg
DC	650kg	665kg	735kg	800kg	842kg	1045kg
<b>POWER</b>						
AC	580V/220V/110V	580V/220V/110V	580V/220V/110V	580V/220V/110V	580V/220V/110V	580V/220V/110V
AC Motor	1.5KW	1.5KW	1.5KW	1.5KW	1.5KW	1.5KW
DC	2x12V	2x12V	2x12V	2x12V	2x12V	2x12V
DC motor	1.0KW	1.0KW	1.0KW	1.0KW	1.0KW	1.0KW
Charger	12V/15A	12V/15A	12V/15A	12V/15A	12V/15A	12V/15A

Effective Date: July, 2021. Product specifications and prices are subject to change without notice or obligation.



FORKLIFT POCKET



FOLDING-DOWN GUARDRAILS



DEADMAN SWITCH



OUTRIGGER INTERLOCK

- Outrigger Interlock
- Deadman switch
- AC power on Platform
- Emergency Stop Button
- Emergency Lowering system
- Levelling Bubble
- Forklift Pocket
- Cylinder Holding Valve



SELF-PROPELLED VERTICAL LIFT

MODEL	AMWP6-1100	AMWP7.5-1100
Max. Working Height	8.00m	9.50m
Max. Platform Height	6.00m	7.50m
Loading Capacity	150kg	125kg
Occupants	1	1
Overall Length	1.40m	1.40m
Overall Width	0.76m	0.76m
Overall Height	1.99m	1.99m
Platform Dimension	0.66m x 0.67m	0.66m x 0.67m
Wheel Base	1.14m	1.14m
Turning Radius	0	0
Travel Speed(Stowed)	3.5km/h	4km/h
Travel Speed(Raised)	0.8km/h	1.3km/h
Up/Down Speed	48/40sec	53/45sec
Gradeability	25%	25%
Drive Tyres	Φ305 x 100mm	Φ305 x 100mm
Drive Motors	2 x 24VDC/0.5kW	2 x 24VDC/0.5kW
Lifting Motor	24VDC/1.3kW	24VDC/1.3kW
Battery	2 x 12V/100Ah	2 x 12V/100Ah
Charger	24V/15A	24V/15A
Weight	1120kg	1190kg

Effective Date: July, 2021. Product specifications and prices are subject to change without notice or obligation.

- Proportional controls
- Automatic pothole protection
- Drivable at full height
- Non-marking tyre
- Automatic brake system
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system





05

AMWP2100

REES

SELF-PROPELLED VERTICAL LIFT

## SELF-PROPELLED VERTICAL LIFT

MODEL	AMWP7.5-2100	AMWP9-2100
Max. Working Height	9.50m	11.00m
Max. Platform Height	7.50m	9.00m
Loading Capacity	200kg	150kg
Occupants	1	1
Overall Length	1.46m	1.46m
Overall Width	1.01m	1.03m
Overall Height	1.99m	1.99m
Platform Dimension	1.00m×0.65m	1.00m×0.65m
Wheel Base	1.14m	1.14m
Turning Radius	0	0
Travel Speed(Stowed)	4km/h	4km/h
Travel Speed(Raised)	1.1km/h	1.1km/h
Up/Down Speed	48/40sec	56/48sec
Gradeability	25%	25%
Drive Tyres	Φ305×100mm	Φ305×100mm
Drive Motors	2×24VDC/0.5KW	2×24VDC/0.5KW
Lifting Motor	24VDC/1.3KW	24VDC/1.3KW
Battery	2×12V/100Ah	2×12V/100Ah
Charger	24V/15A	24V/15A
Weight	1270kg	1345kg

Effective Date: July, 2021. Product specifications and prices are subject to change without notice or obligation.

- Proportional controls
- Automatic pothole protection
- Drivable at full height
- Non-marking tyre
- Automatic brake system
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system





SELF-PROPELLED SCISSOR LIFT

MODEL	JCPT0307	JCPT0407
Loading Capacity	240kg	240kg
Max. Platform Height	3m	4m
Occupants	1	1
Platform Dimension	1.15×0.6m	1.15×0.6m
Overall Length	1.32m	1.32m
Overall Width	0.76m	0.79m
Overall Height	1.83m	3.02m
Platform Extension	0.55m	0.55m
Extension Load	100kg	100kg
Up/Down Speed	31/22sec	34/25sec
Turning Radius	0	0
Maximum Slope	1.5°/2°	1.5°/2°
Drive Tyres	Φ0.23×0.08m	Φ0.23×0.08m
Gradeability	25%	25%
Wheel Base	1.0m	1.0m
Travel Speed(Stowed)	4km/h	4km/h
Travel Speed(Raised)	0.5km/h	0.5km/h
Battery	2×12v/100Ah	2×12v/100Ah
Lifting Motor	24v/1.3kw	24v/1.3kw
Drive Motors	2×24v/0.4kw	2×24v/0.4kw
Charger	24v/15A	24v/25A
Weight	630kg	660kg

Effective Date: July, 2021. Product specifications and prices are subject to change without notice or obligation.

- Proportional controls
- Automatic pothole protection
- Drivable at full height
- Non-marking tyre
- Automatic brake system
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system



07

QJCPT-PA

REES

MOBILE SCISSOR LIFT



## MOBILE SCISSOR LIFT

MODEL	JCPT03PA	JCPT04PA
Loading Capacity	240kg	240kg
Max. Platform Height	3m	3.9m
Overall Length	1.32m	1.32m
Overall Width	0.76m	0.76m
Overall Height	1.83m	1.92m
Platform Dimension	1.15 x 0.80m	1.15 x 0.80m
Wheel base	1.0m	1.0m
Occupants	1	1
Ground Clearance	0.05m	0.05m
Up/Down Speed	34/20sec	34/25sec
Tyre	6in/8in	6in/8in
Lifting Motor	12v/1.3kw	12v/1.3kw
Battery	12v/100Ah	12v/100Ah
Charger	12v/15A	12v/15A
Weight	482kg	516kg

Effective Date: July, 2023. Product specifications and prices are subject to change without notice or obligation.



- Battery charge indicator
- Self-lock gate on platform
- Leveling Bubble
- Safety brackets
- Emergency Lowering System
- Emergency Stop Button
- Forklift Pocket
- Cylinder Holding Valve



SINGLE MAST-SWING OUTRIGGER

MODEL	AWP1-6	AWP1-8	AWP1-9	AWP1-10
Loading Capacity	150kg	150kg	150kg	150kg
Occupants	1	1	1	1
Max. Working Height	8.00m	10.00m	11.00m	12.00m
Max. Platform Height	6.00m	8.00m	9.00m	10.00m
Overall Length	1.34m	1.34m	1.43m	1.45m
Overall Width*	0.85m	0.85m	0.85m	0.85m
Overall Height	1.99m	1.99m	1.99m	1.99m
Platform Dimension	0.60m*0.55m	0.60m*0.55m	0.60m*0.55m	0.60m*0.55m
Outrigger coverage	1.7m*1.67m	1.7m*1.67m	1.93m*1.77m	1.93m*1.77m
Lifting Motor	0.75KW	0.75KW	0.75KW	1.1KW
Weight(AC)	325kg	378kg	400kg	430kg
Option	DC	12V/100Ah	12V/100Ah	12V/100Ah
	Motor	1.3KW	1.3KW	1.3KW
	Charger	12V/15A	12V/15A	12V/15A

Effective Date: July, 2021. Product specifications and prices are subject to change without notice or obligation.



- Deadman switch
- AC power on Platform
- Self-lock gate on platform
- Leveling Bubble
- Emergency Lowering System
- Emergency Stop Button
- Forklift Pocket
- Cylinder Holding Valve



### SINGLE MAST-SWING OUTRIGGER

MODEL	AWP2-6	AWP2-8	AWP2-9	AWP2-10	AWP2-12	
Loading Capacity	200kg	200kg	200kg	200kg	200kg	
Occupants	2	2	2	2	2	
Max. Working Height	6.00m	10.00m	11.00m	12.00m	14.00m	
Max. Platform Height	6.00m	8.00m	9.00m	10.00m	12.00m	
Overall Length	1.54m	1.54m	1.54m	1.76m	1.76m	
Overall Width*	1.00m	1.00m	1.00m	1.00m	1.00m	
Overall Height	1.99m	1.99m	1.99m	1.99m	1.99m	
Platform Dimension	1.30m*0.62m	1.30m*0.62m	1.30m*0.62m	1.52m*0.62m	1.52m*0.62m	
Outrigger coverage	1.77m*1.82m	1.77m*1.82m	1.77m*1.82m	2.1m*2.00m	2.1m*2.00m	
Lifting Motor	1.5KW	1.5KW	1.5KW	1.5KW	1.5KW	
Weight(AC)	630kg	680kg	730kg	800kg	830kg	
Option	DC	2x12V/100Ah	2x12V/100Ah	2x12V/100Ah	2x12V/100Ah	2x12V/100Ah
	Motor	1.6KW	1.6KW	1.6KW	1.6KW	1.6KW
	Charger	12V/15A	12V/15A	12V/15A	12V/15A	12V/15A

Effective Date: July, 2021. Product specifications and prices are subject to change without notice or obligation.

- Deadman switch
- AC power on Platform
- Self-lock gate on platform
- Leveling Bubble
- Emergency Lowering System
- Emergency Stop Button
- Forklift Pocket
- Cylinder Holding Valve





### MANUAL VERTICAL LIFT

MODEL	AWP11-3.3	AWP11-4.6
<b>Platform</b>		
Max. Working Height	5.3m	6.6m
Max. Platform Height	3.3m	4.6m
Loading Capacity	120kg	120kg
Occupants	1	1
Platform Dimension	0.7m x 0.62m	0.7m x 0.62m
<b>Overall Dimension</b>		
Overall Height	2m	2m
Overall Width	0.76m	0.92m
Overall Length	1.15m	1.37m
Outrigger coverage	1.5m x 1.37m	1.84m*1.67m
Weight	160kg	250kg



Effective Date: July, 2021. Product specifications and prices are subject to change without notice or obligation.

### MATERIAL LIFT

MODEL	AML3	AML4.5	AML6	AML7.5	
<b>PLATFORM</b>					
Working Height	Fork down	2.97m	4.46m	5.94m	7.42m
	Fork up	3.49m	4.98m	6.46m	7.94m
Height - stowed		1.98m	1.96m	1.99m	1.99m
Length - stowed		0.74m	0.74m	0.74m	0.75m
Length - operating		1.51m	1.88m	2.08m	2.08m
Width stowed		0.8m	0.8m	0.8m	0.8m
with stabilizer lowered		1.85m	1.85m	1.85m	1.85m
Ground Clearance		0.05m	0.05m	0.05m	0.05m
<b>PRODUCTIVITY</b>					
Load Capacity	46cm load center	454kg	363kg	363kg	299kg
	61cm load center	454kg	363kg	272kg	204kg
107cm load center		181kg	227kg	159kg	113kg
<b>WEIGHT</b>					
Overall Weight		118kg	151kg	184kg	204kg

Effective Date: July, 2021. Product specifications and prices are subject to change without notice or obligation.

