

Conductivity probe type EL23

Application and function

The level probe EL 22 in connection with the controller FAR1 and a desalting valve is a continuous desalting regulation.

In connection with the controller FLB1 the probes serves as conductivity limitation.

Technical basic equipment

Mechanical connection	G ½ (SW27)	
Electrical connection	Plug connection with screw terminals, traction relief	
Material	Probe housing	stainless steel
	Probe rod	stainless steel
	Insulator	Ceramic
	Socket	Polyamid
	Sealing ring	Soft iron
	Process flange	1.0460


Technical data

Component mark	TÜV ID: 0000006175		
Allowable pressure	PS	[bar]	50 80
Allowable temperature	TS	[° C]	265 296
Cable gland			M16x1,5
Protection as per DIN VDE 0470			IP65
Allowable temperature on plug			100° C
Dimension H [mm]			max. 500


Information:

The first delivery includes the process connection flange with integrated protection tube

- inclined installation, from 45° up to 15
- screws, nuts and gaskets deliverable

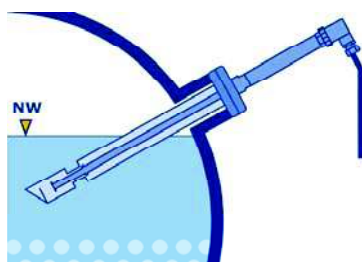

Installation example

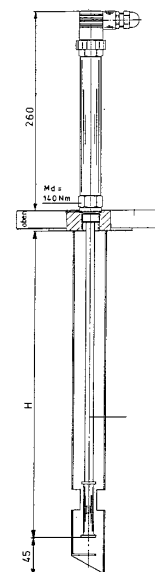

Caution! Never shorten or prolong the probe



- Baumuster geprüft
- Fertigung überwacht

